





Glass roof system



Murano
Integrale Z

Just
enjoy life!


Lewens
MARKISEN

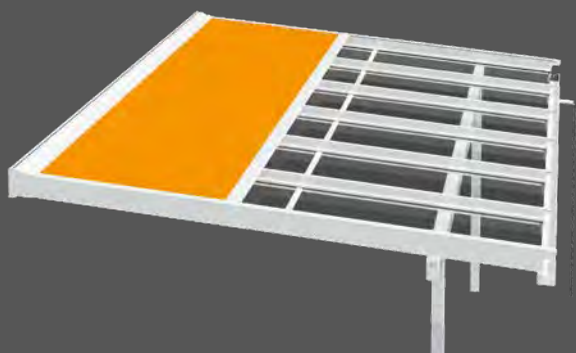



Murano Integrale Z

Glass roof with integral zip awning



Overhang type (Ü)

with recessed posts

Here the posts can stand e.g. on the patio with the roof overhang taken out over them. Rainwater is drained via a water spout (standard) or optionally via a stainless steel rain chain or downpipes.



Bespoke weather protection

- Width max. 700 cm, depth max. 500 cm
- With 2 to 3 posts *[depending on load and type]*
- Optional roof pitch of 3° to 20° *[stepless]*
- Zip guide and patented balance spring technology




- Electric motor
- Awning fabric:
acrylic *[standard]*, polyester *[option]*
- Options:
Radio motor/radio remote control,
automatic weather sensor,
LED lighting, radiant heater



Fabric guide

ZIP (Z)

Tracks with a lateral zip guide and patented balance spring technology ensure a taut sit of the fabric and complete protection from the sun.

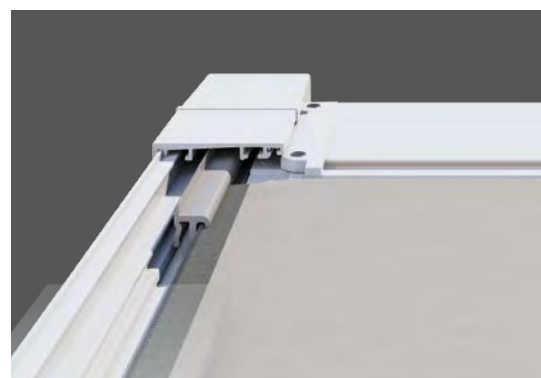

Enjoy the patio at any time of the year and in any weather: the Murano Integrale Z glass roof with integral zip awning offers the perfect all-weather protection, even for large patios. It embodies the ultimate in quality and convenience and features a zip guide and patented balance spring technology. These ensure that the awning on the Murano Integral Z is always ideally tensioned and offers complete protection from the sun without any intrusive light gaps at the sides.



Flush type (B)

with front-facing posts

The posts are in line with the gutter for a compact, modern look. Rainwater is drained via the rafters, gutter and down the inside of the post.




Murano Integrale Z

Equipment and technical features



Manufactured and assembled in Germany
TUV-tested safety
Quality and technology CE-compliant

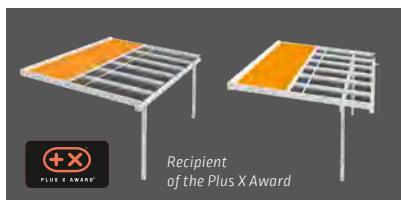

Styles	Flush (B) Type		Overhang (Ü) Type	
	B1, B2	B3	Ü1, Ü2, Ü3	
– Posts laterally external		B1	Ü1	
– Posts laterally recessed		B2	Ü2	
– with 3rd support		B3	Ü3	
– Overhang (inner edge of post – outer edge of gutter)		–	30 - 100 cm	
– Reinforcement: steel (s)		...s	...s	
Fabric guide		ZIP (Z)	ZIP (Z)	
Dimensions (max.)				
Width, 1 unit (single field)		700 cm	700 cm	
Depth (type B: to inner edge of post; type Ü: to outer edge of gutter)		500 cm	500 cm	
Pitch angle, stepless (at least 5° recommended)		3° - 20°	3° - 20°	
Rafter spacings (max., depending on type, roof size, load)		120 cm	120 cm	
Post height 240 cm		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Longer posts		<input type="checkbox"/>	<input type="checkbox"/>	
Rainwater drainage				
Downpipe integrated into post		<input checked="" type="checkbox"/>	–	
Downpipe, external in front of post		–	<input type="checkbox"/>	
Water spout (1 item)		–	<input checked="" type="checkbox"/>	
Glazing				
for laminated safety glass (LSG, clear) or twin-wall sheets		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Drive				
Electric motor (for wall switch)		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Radio motor (io)		<input type="checkbox"/>	<input type="checkbox"/>	
Frame colours				
17 RAL colours + 6 textured finishes (Lewens standard colours)		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Additional RAL, special colours and effect finishes		<input type="checkbox"/>	<input type="checkbox"/>	
Awning fabrics from the LEWENS collection				
Branded acrylic (spun-dyed, ultra fade resistant)		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Branded polyester (spun-dyed, ultra fade resistant)		<input type="checkbox"/>	<input type="checkbox"/>	
Tenara quality sewing yarn		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
with lateral attachment strip (approx. 15 cm)*		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Options				
Radio motor + radio remote control (io)		<input type="checkbox"/>	<input type="checkbox"/>	
Automatic weather sensor (sun, wind, rain)		<input type="checkbox"/>	<input type="checkbox"/>	
Lighting - LED strips, LED spot bar		<input type="checkbox"/>	<input type="checkbox"/>	
Radiant heater (only wall attachment)		<input type="checkbox"/>	<input type="checkbox"/>	
Glass joint		<input type="checkbox"/>	<input type="checkbox"/>	
Additional drainage (downpipe integrated into post)		<input type="checkbox"/>	–	
Rain chain/additional water spout or downpipe		–	<input type="checkbox"/>	
Lateral connection profile/various profiles/support frame		<input type="checkbox"/>	<input type="checkbox"/>	


* On multistripe fabrics, the pattern repeat may be displaced in the area of the attachment strip seam!

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.


■ Standard □ Option
– not available
! Not included in scope of supply

Types and styles


B1 flush, external
B1s as B1, with steel reinforcement




B2 flush, laterally recessed
B2s as B2, with steel reinforcement




B3 as B1, with 3rd support
B3s as B3, with steel reinforcement




Ü1 rafter overhang, external
Ü1s as Ü1, with steel reinforcement



Ü2 rafter overhang, laterally recessed
Ü2s as Ü2, with steel reinforcement



Ü3 as Ü1, with 3rd support
Ü3s as Ü3, with steel reinforcement



Your stockist will be happy to advise you:

Lewens
MARKISEN



www.lewens-markisen.de

Subject to technical alterations. Date: 01/2022