


Glass roof system

Murano Integrale Z

Just
enjoy life!

Lewens
MARKISEN

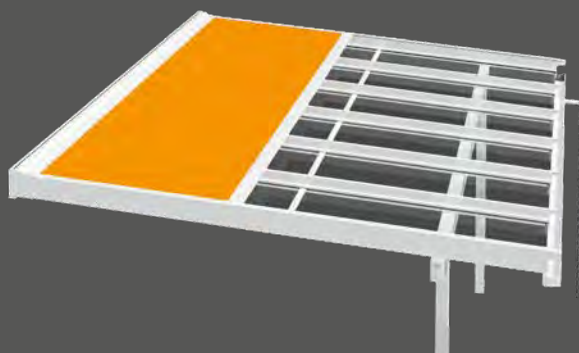



Murano Integrale Zip

Glass roof with integral zip awning



Overhang type (Ü)

with recessed posts

Here the posts can stand e.g. on the patio with the roof overhang taken out over them. Rainwater is drained via a water spout (standard) or optionally via a stainless steel rain chain or downpipes.



Bespoke weather protection

- Width max. 700 cm, depth max. 500 cm
- With 2 to 3 posts *[depending on load and type]*
- Optional roof pitch of 3° to 20° *[stepless]*
- Zip guide and patented balance spring technology




- Electric motor
- Awning fabric:
Acrylic *[standard]*,
polyester *[option]*
- Options:
Radio motor/radio remote control,
automatic weather sensor,
LED lighting,
radiant heater



Fabric guide

ZIP [Z]

Tracks with a lateral zip guide and patented balance spring technology ensure a taut sit of the fabric and complete protection from the sun.

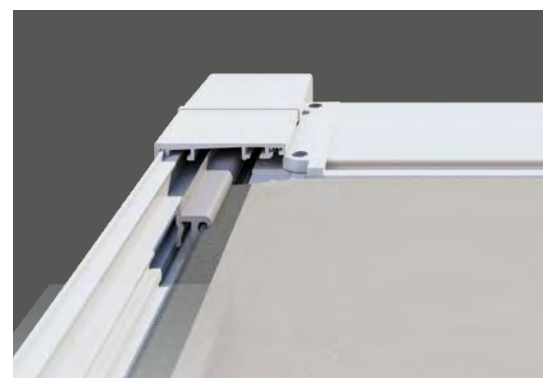

Enjoy the patio at any time of the year and in any weather: the Murano Integrale Zip glass roof with integral zip awning offers the perfect all-weather protection, even for large patios. It embodies the ultimate in quality and convenience and features a zip guide and patented balance spring technology. These ensure that the awning on the Murano Integral Zip is always ideally tensioned and offers complete protection from the sun without any intrusive light gaps at the sides.



Flush type (B)

with front-facing posts

The posts are in line with the gutter for a compact, modern look.

Rainwater is drained via the rafters, gutter and down the inside of the post.




Murano Integrale Zip

Equipment and technical features



Manufactured and assembled in Germany
TUV-tested safety
Quality and technology CE-compliant

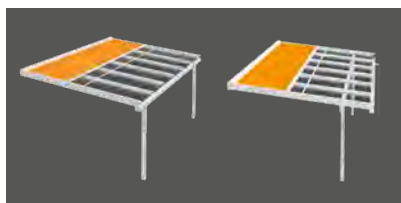

| Styles | Flush (B) Type B1, B2 B3 | Overhang (Ü) Type Ü1, Ü2, Ü3 |
|--|--------------------------------|------------------------------------|
| – Posts laterally external | B1 | Ü1 |
| – Posts laterally recessed | B2 | Ü2 |
| – with 3rd support | B3 | Ü3 |
| – Overhang (inner edge of post – outer edge of gutter) | – | 30 - 100 cm |
| – Reinforcement: steel (s) | ...s | ...s |
| Fabric guide | ZIP (Z) | ZIP (Z) |
| Dimensions (max.) | | |
| Width, 1 unit (single field) | 700 cm | 700 cm |
| Depth (type B: to inner edge of post; type Ü: to outer edge of gutter) | 500 cm | 500 cm |
| Pitch angle, stepless (at least 5° recommended) | 3° - 20° | 3° - 20° |
| Rafter spacings (max., depending on type, roof size, load) | 120 cm | 120 cm |
| Post height 240 cm | ■ | ■ |
| Longer posts | □ | □ |
| Rainwater drainage | | |
| Downpipe integrated into post | ■ | – |
| Downpipe, external in front of post | – | □ |
| Water spout (1 item) | – | ■ |
| Glazing | | |
| for laminated safety glass (LSG, clear) or twin-wall sheets | ! | ! |
| Drive | | |
| Electric motor (for wall switch) | ■ | ■ |
| Radio motor | □ | □ |
| Frame colours | | |
| 29 Lewens standard frame colours | ■ | ■ |
| Additional RAL, special colours and effect finishes | □ | □ |
| Awning fabrics from the LEWENS collection | | |
| Branded acrylic (spun-dyed, ultra fade resistant) | ■ | ■ |
| Branded polyester (spun-dyed, ultra fade resistant); no recycled polyester | □ | □ |
| Tenara quality sewing yarn | ■ | ■ |
| with lateral attachment strip (approx. 15 cm)* | ■ | ■ |
| Options | | |
| Radio motor + radio remote control | □ | □ |
| Automatic weather sensor (sun, wind, rain) | □ | □ |
| Lighting - LED strips, LED spot bar | □ | □ |
| Radiant heater (only wall attachment) | □ | □ |
| Glass joint | □ | □ |
| Additional drainage (downpipe integrated into post) | □ | – |
| Rain chain/additional water spout or downpipe | – | □ |
| Lateral connection profile/various profiles/support frame | □ | □ |

* On multistripe fabrics, the pattern repeat may be displaced in the area of the attachment strip seam!

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.


■ Standard □ Option
– not available

! Not included in scope of supply

Types and styles


B1 flush, external

B1s as B1, with steel reinforcement




B2 flush, laterally recessed

B2s as B2, with steel reinforcement




B3 as B1, with 3rd support

B3s as B3, with steel reinforcement




Ü1 rafter overhang, external

Ü1s as Ü1, with steel reinforcement




Ü2 rafter overhang, laterally recessed

Ü2s as Ü2, with steel reinforcement



Ü3 as Ü1, with 3rd support

Ü3s as Ü3, with steel reinforcement



Your stockist will be happy to advise you:

Lewens
MARKISEN



www.lewens-markisen.de

Subject to technical alterations. Date: 07/2024